


WIRELESS

CASAMBI Bluetooth Wireless Dimmable Constant Current LED Driver

Constant Current - Wireless - BLE Dimmable LED Driver



Wiring diagram

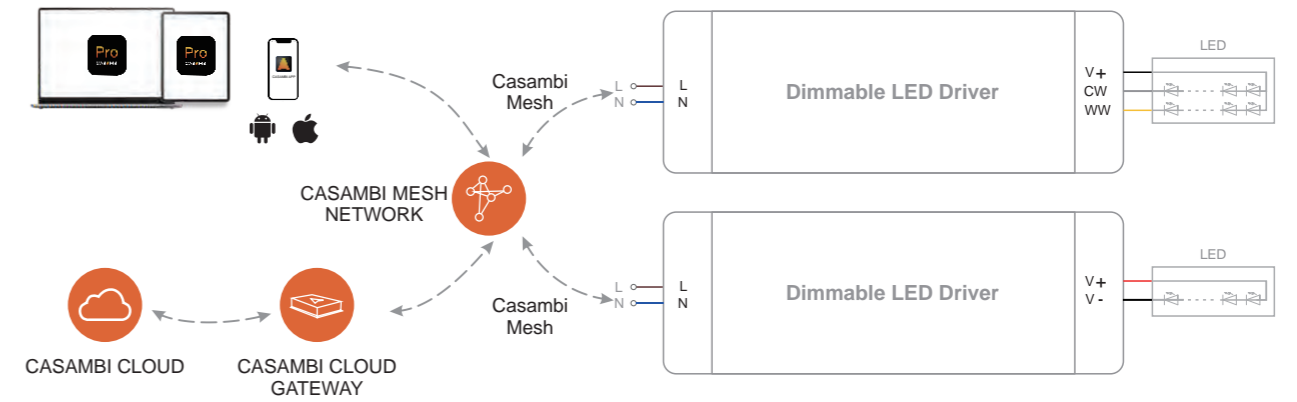

● CASAMBI APP function : Setting output current ratio

CASAMBI APP Download



CASAMBI App



For iPhone users



For Android users

SMT-CB Series (BLE | CASAMBI)



1-2 CH
Dimming | CCT



CASAMBI
Modules



1 - 100%
Full dimming range



8K
8K Hz frequency
Flicker-free



IoT
Setting scene, area control,
timing dimming, music control...



Flicker-free
Smooth dimming

Perfect for LED fixtures



Spotlights



Downlights



Spotlights

SMT-CB-020-1C-P

1 2 3 4

1 CASAMBI Bluetooth Wireless

2 Power: 20W

3 1C: 1CH Dimming
2C: 2CH CCT

4 P: IP20 Plastic driver



IP20 plastic driver
20W
For dry and damp location

Power	Picture	Model	Output	Input	Size	Channels	Location	Others
20W		SMT-CB-020-1C-P	6-42V 0-650mA	100-277AC	159.5*43*20mm	1CH	Dry Damp	Class P
		SMT-CB-020-2C-P	6-42V 0-650mA	100-277AC	159.5*43*20mm	2CH	Dry Damp	Class P

Wireless BLE